

PRODUCT PREVIEW


160x 128 Monochrome

SPECIFICATIONS

MODULE

Part Number	G-16012808T-VA
Format	160 Columns by 128 Rows
Controller	N/A
Overall Dimensions	74.0mm x 66.1mm x 5.4mm
Active Area	62.38mm x 49.9mm
Pixel Pitch	390um x 390um
Pixel Size	370um x 370um
Backlight System	LED
Driver Attach	N/A
Display Type	R,TF,TM
Duty	N/A
Bias	N/A

1.0 DIMENSIONAL DRAWING

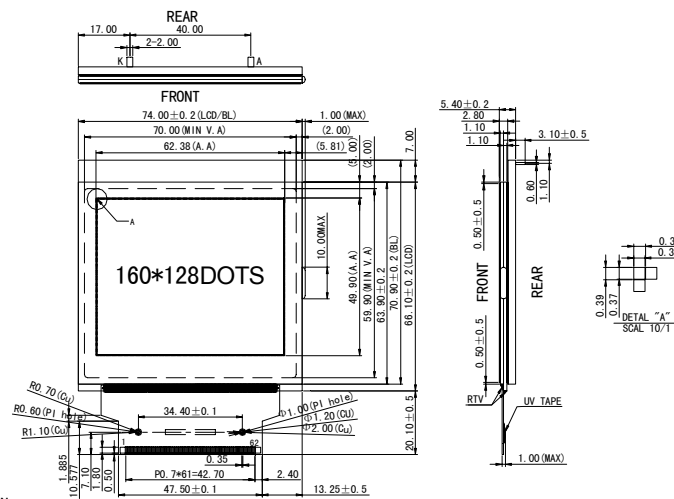

- Note:
1. Display Type: STN-BLUE, Negative, Transmissive
 2. Backlight: LED, white
 3. Controller: ST7529; VDD:3.3V
 4. Operating Temperature: -20°C ~ +70°C
 5. Storage Temperature: -30°C ~ +80°C
 6. ROHS
 7. Unmarked Toerances: ±0.2mm
- Remark:Both display type and backlight color of the LCM can be customized per request.


Phoenix Display International reserves the right to change document without prior notice and disclaims all warranties. It is the recipients duty to confirm with PDI before proceeding with a design. This document is PDI confidential and should not be reproduced without PDI approval.



PRODUCT PREVIEW

160 x 128 Monochrome

2.0 BLOCK DIAGRAM

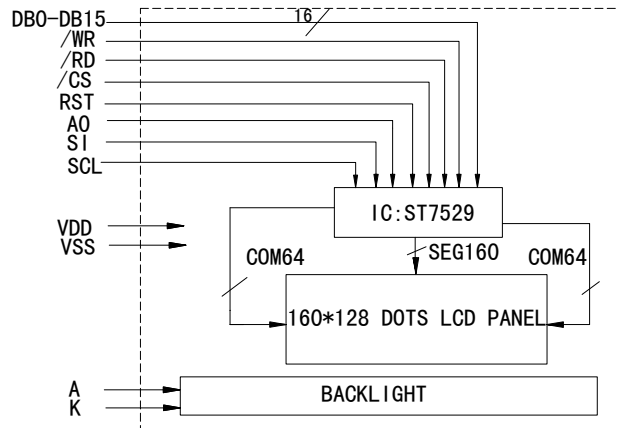

5.0 PIN ASSIGNMENT

PIN No.	Symbol
1	NC
2	NC
3	VSS
4	VSS
5	VSS
6	VDD
7	CL
8	CLS
9	A0
10	WR
11-26	DB0-DB15
27	RD
28	RST
29	M0
30	M1

PIN No.	Symbol
31	IF1
32	IF2
33	IF3
34	SI
35	SCL
36	/CS
37	VDD
38	VSS
39	VSS
40	VDD
41	C7+
42	C1-
43	C5+
44	C3+
45	C1-
46	C1+

PIN No.	Symbol
47	C2+
48	C2-
49	C4+
50	C2-
51	C6+
52	VLCIN
53	VLCDOU
54	VREF
55	V4
56	V3
57	V2
58	V1
59	V0OUT
60	V0IN
61	NC
62	NC

Phoenix Display International reserves the right to change document without prior notice and disclaims all warranties. It is the recipients duty to confirm with PDI before proceeding with a design. This document is PDI confidential and should not be reproduced without PDI approval.

