

Phoenix Display International, Inc.

PRODUCT PREVIEW

320x 240 Monochrome

TN/STN


Graphics
Liquid Crystal Display

SPECIFICATIONS

MODULE

| | |
|------------------|---------------------------|
| Part Number | PDI320240B0-TFH-VZ |
| Display Format | 320 x 240 Graphic Display |
| Module Size | 160.0 x 109.0 x 13.0 |
| Diagonal | 5.70 |
| Active Area | 115.2 x 86.4 |
| Pixel Pitch | 0.360 x 0.360 |
| Backlight System | LED |
| Display Type | R,TF,TM |
| Glass Type | STN, FSTN |

1.0 DIMENSIONAL DRAWING

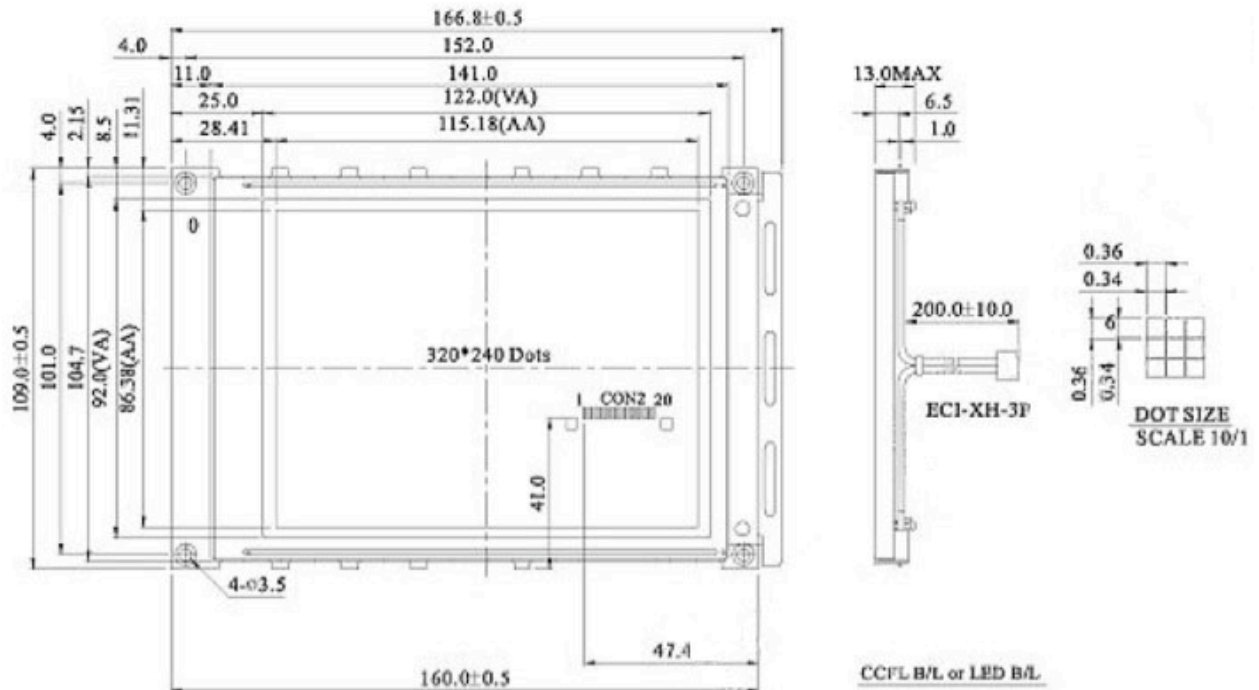

Phoenix Display International reserves the right to change this document without prior notice and disclaims all warranties. It is the recipient's duty to confirm with PDI before proceeding with a design. This document is PDI confidential and should not be reproduced without PDI approval.



Phoenix Display International, Inc.
www.phoenixdisplay.com sales@phoenixdisplay.com
 Tel: (630) 359-5700 or (480) 775-6315

3.0 ELECTRICAL CHARACTERISTICS

Standard Value

| Item | Symbol | Condition (degrees C) | min. | typ. | max. | Unit |
|--|--------|-----------------------|-------|------|-------|------|
| Input Voltage | VDD | L level | .7VDD | --- | VDD | V |
| Input Voltage | VIO | H level | 0 | --- | .3VDD | V |
| Supply Current | IDD | VDD=5V | --- | 100 | 105 | mA |
| Recommended LC Driving Voltage for Normal Temp. Version Module | VDD-V0 | -20 | --- | --- | 26.1 | V |
| Recommended LC Driving Voltage for Normal Temp. Version Module | VDD-V0 | 25 | --- | 23.8 | --- | V |
| Recommended LC Driving Voltage for Normal Temp. Version Module | VDD-V0 | 70 | 20.9 | --- | --- | V |
| CCFL Starting Voltage | VFLS | 25 | --- | 600 | --- | Vrms |
| CCFL Driving Voltage | VFLD | 25 | --- | 268 | --- | Vrms |
| CCFL Driving Current | IFLD | VFQ=450Vms 300KHZ | --- | 5.0 | --- | mAms |

4.0 ABSOLUTE MAXIMUM RATINGS

| Item | Symbol | Standard Value | | | Unit |
|---------------|---------|----------------|------|------|------|
| | | min. | typ. | max. | |
| Power Supply | VDD-VSS | 4.75 | 5 | 5.25 | V |
| Input Voltage | VI | -0.3 | --- | VDD | V |

5.0 PIN ASSIGNMENT

| Pin No. | Symbol | Pin No. | Symbol |
|---------|--------|---------|--------|
| 1 | VSS | 11 | DB4 |
| 2 | VDD | 12 | DB5 |
| 3 | V0 | 13 | DB6 |
| 4 | A0 | 14 | DB7 |
| 5 | WR | 15 | CS |
| 6 | RD | 16 | RES |
| 7 | DB0 | 17 | VEE |
| 8 | DB1 | 18 | SEL |
| 9 | DB2 | 19 | FG |
| 10 | DB3 | 20 | WAIT |

