

Phoenix Display International, Inc.

PRODUCT PREVIEW

128 x 80 Monochrome

TN/STN


Graphics
Liquid Crystal Display

SPECIFICATIONS

MODULE

Part Number	G-1288001G-VA
Format	128 Columns by 80 Rows
Controller	SSD1821Z
Overall Dimensions	32.0mm x 33.0mm x 1.4mm
Active Area	24.9mm x 20.8mm
Pixel Pitch	195um x 260um
Pixel Size	180um x 180um
Backlight System	EL
Driver Attach	Chip on Glass (COG)
Glass Type	STN, FSTN
Display Type	R,TF,TM
Duty	1/80

1.0 DIMENSIONAL DRAWING

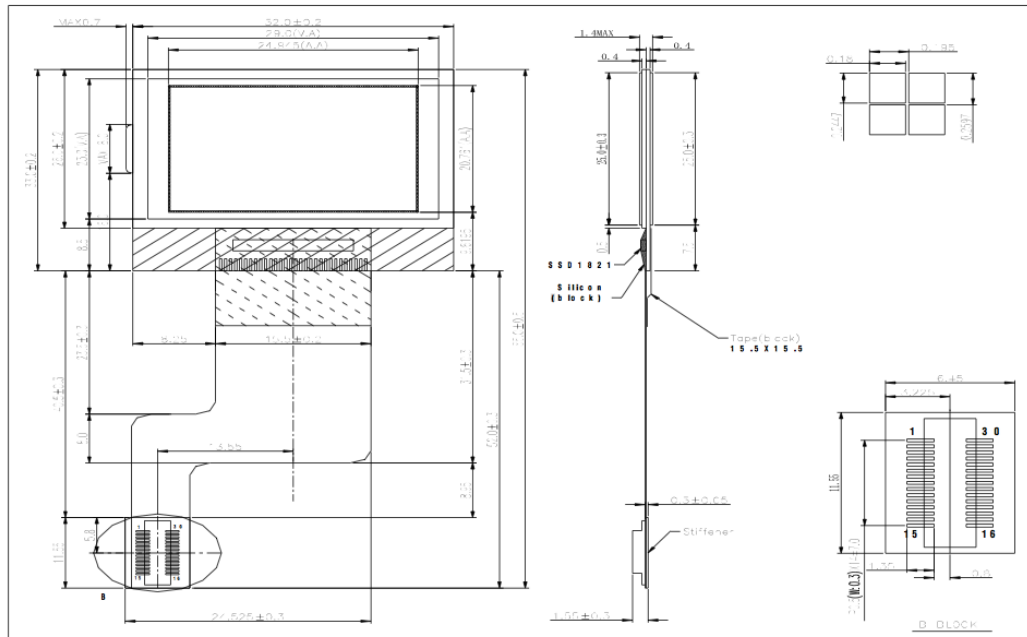

Phoenix Display International reserves the right to change this document without prior notice and disclaims all warranties. It is the recipient's duty to confirm with PDI before proceeding with a design. This document is PDI confidential and should not be reproduced without PDI approval.



Phoenix Display International, Inc.
www.phoenixdisplay.com sales@phoenixdisplay.com
 Tel: (630) 359-5700 or (480) 775-6315

Phoenix Display International, Inc.


PRODUCT PREVIEW

128 x 80 Monochrome

TN/STN

Graphics
Liquid Crystal Display

2.0 BLOCK DIAGRAM

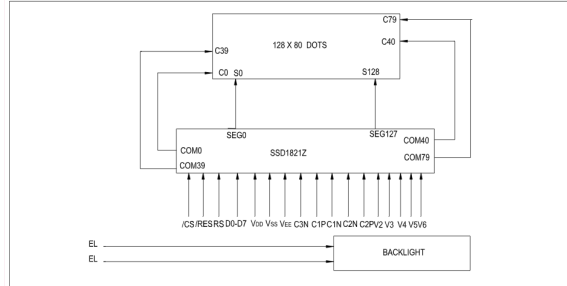

3.0 ELECTRICAL CHARACTERISTICS Ta=25 °C VDD=2.7V±0.25V

Item	Symbol	Test Condition	Standard Value			Unit
			Min.	Typ.	Max.	
Power Supply Voltage	V _{DD} -V _{SS}	25°C	2.4	3.0	3.5	V
LCD Operation Voltage	V _{OP}		-	9.6	13	V
LCM Current Consumption	I _{DD}		-	90	120	μA
Backlight Forward Voltage	V _F		-	100	-	Vrms

4.0 ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Test Condition	Standard Value		Unit
			Min.	Max.	
Supply Voltage (Logic)	V _{DD} -V _{SS}	25°C	-0.3	4.0	V
Supply Voltage (LCD)	V _{DD} -V _O		-0.3	12	V
Input Voltage	V _{IN}		-0.3	V _{DD} +0.3	V
Operating Temp.	T _{OPR}		-30	70	°C
Storage Temp.	T _{STR}		-40	80	°C

5.0 PIN ASSIGNMENT

PIN No.	Symbol	Description
1	V5	LCD driver supply voltage
2	V4	LCD driver supply voltage
3	V6	LCD driver supply voltage
4	V3	LCD driver supply voltage
5	GND	GND
6	V2	LCD driver supply voltage
7	VDD	Power supply
8	V _{LCD}	Connect to 1.0uF GND
9	GND	GND
10	C1-	Connect to 1.0uF C1N
11	C1+	-
12	C3+	Connect to 1.0uF C1N
13	C4+	Connect to 1.0uF C2N
14	C2-	-
15	C2+	Connect to 1.0uF C2N
16	RS	H: Data signal, L: Instruction signal
17	/CS	Chip select pin
18	/WR	Write mode
19	/RES	Reset signal
20	/RD	Read mode
21	DB0	Data bus
22	NC	-
23	DB1	Data bus
24	NC	-
25	DB2	Data bus
26	DB7	Data bus
27	DB3	Data bus
28	DB6	Data bus
29	DB4	Data bus
30	DB5	Data bus

Remark

- LCD option: STN, FSTN .
- Customized module.
- Backlight option: EL backlight feature, other specs not available on catalog is under request.

